

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
6 May 2004 (06.05.2004)

PCT

(10) International Publication Number
WO 2004/038741 A1

(51) International Patent Classification:
H02K 41/035, H04R 9/02

H01F 7/06,

(74) Agent: SEKIMURA, Gerald, T.; Gray Cary Ware & Freidenrich LLP, 153 Townsend Street, Suite 800, San Francisco, CA 94107 (US).

(21) International Application Number:

PCT/US2003/033306

(81) Designated States (*national*): CN, JP, KR.

(22) International Filing Date: 21 October 2003 (21.10.2003)

(84) Designated States (*regional*): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

60/420,483

21 October 2002 (21.10.2002)

US

Published:

— with international search report


— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(71) Applicant: BEI SENSORS AND SYSTEMS COMPANY, INC. [US/US]; 13100 Telfair Avenue, Sylmar, CA 91342-3573 (US).

(72) Inventor: GODKIN, Mikhail; 4414 Exbury Court, San Diego, CA 92130 (US).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: FLAT LINEAR VOICE COIL ACTUATOR WITH PLANAR COILS AND A SPRING-TYPE CHARACTERISTIC

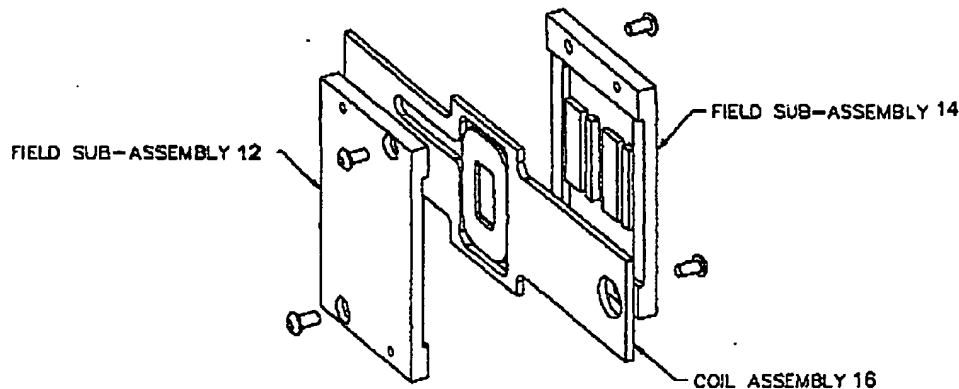

(57) Abstract: Disclosed is a linear coil actuator having field sub-assemblies (12, 14), and a coil assembly (16), in which the field sub-assemblies each have a field blank, and at least one of the field sub-assemblies also includes groups of magnets. Each group of magnets employs magnets having the same or different sizes and arranged to provide a magnetic polarity and a magnetic flux density distribution in the air gap in correspondence to specified load characteristics, such as a spring having a spring constant K. The field sub-assemblies are positioned with respect to one another to form a gap between the field assembly which includes the magnets, and another of the field assemblies, and the coil assembly is moveable in the gap.

WO 2004/038741 A1